Filter: P1P18 Face Shield

Color: Green/Gold **Material:** Polycarbonate

VLT: 47%

Optical Density (OD):

C € EK

185 - 315 D LB10 + IR LB4 (OD10+)

>315 - 466 D LB5 +IR LB8 + M LB8Y (OD8+)

800 - <880 DIRM LB6 (OD6+)

880 - 1070 D LB6 + IR LB8 + M LB10 (OD10+)


>1070 - 1080 DLB6 + IRM LB8 (OD 8+)

>1080 - 1087 D LB6 + IRM LB7 (OD7+)

>1087 - 1100 DIRM LB6 (OD6+)

5250-14000 DI LB4 + R LB3Y (OD5+)

LV CE

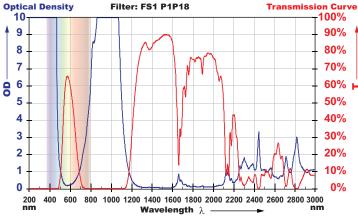



Visual interpretation of data. Please refer to the OD specifications for the actual protection level.


PN FS1.P1P18.1003



- Designed in accordance with ANSI Z136.1 to work with handheld fiber laser welders
- · Protects welders from diffuse laser radiation
- Spring loaded visor mechanism
- Anti-fog coating on the inside Anti-scratch coating on the outside
- Z87.1 compliant
- For head sizes 52-64 cm







Shirley Gibbons (Feb 27, 2024 14:27 CST)

Authorized Laservision Signature