


Filter: P1D09

Color: Light Grey
Material: Polycarbonate
VLT: 55%



Optical Density (OD):

- 1400-<1450 DIRM LB1 (OD 1+)
- 1450-<1640 DIRM LB2 (OD 2+)
- 1640-<1800 DIRM LB3 (OD 3+)
- 1800-<1980 DILB4 + RLB3Y + MLB3 (OD 4+)
- 1980-2600 DILB4 + RLB3Y + MLB3 (OD 5+)
- >2600-3500 DILB4 + RLB3Y + MLB3 (OD 4+)
- >3500-<5400 DIRM LB2 (OD 2+)
- 5400-15000 DILB4 + RLB3Y + MLB4Y (OD 6+)
- LVUF CE

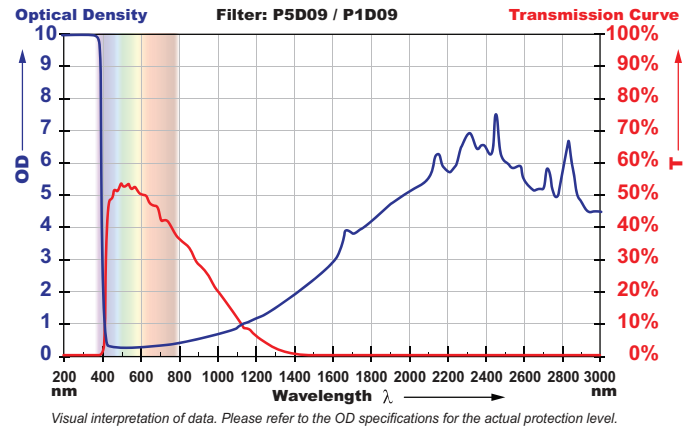

Available Frames

F18.P1D09.5000

F22.P1D09.5000


F42.P1D09.5000

F47.P1D09.5000



Markings *Illustration, may vary slightly from final product.*


F18/F22/F42

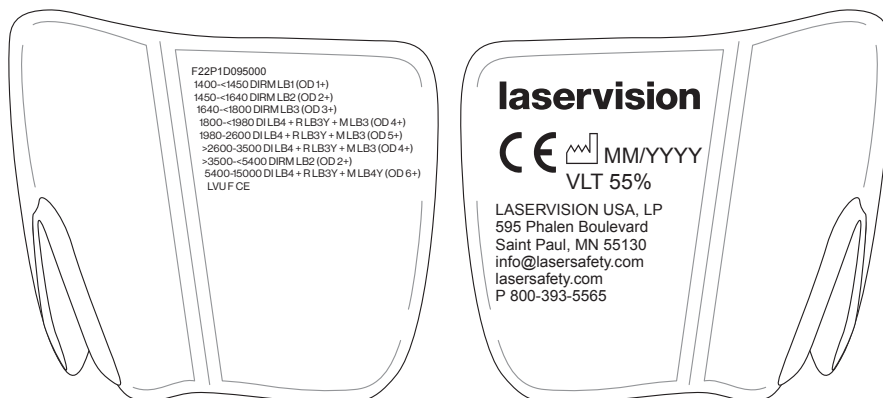

Authorized Laservision Signature

Date

F47

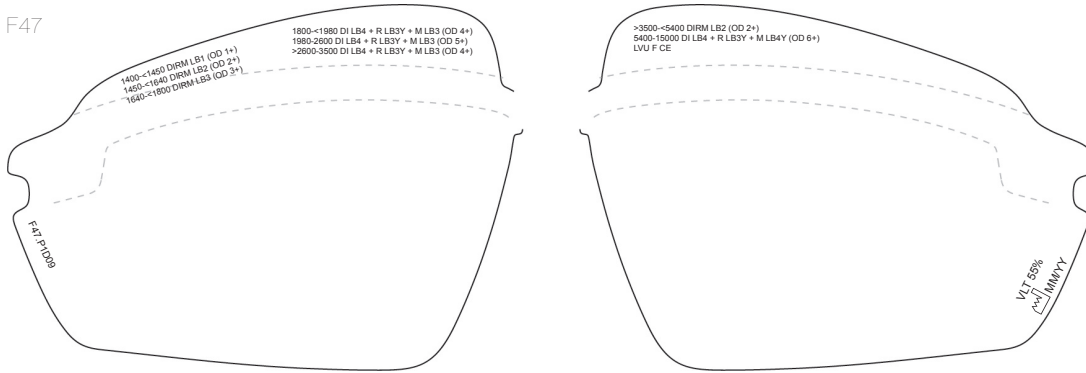

Labels

F18.P1D09.5000

1400-<1450 DIRM LB1 (OD 1+)
 1450-<1640 DIRM LB2 (OD 2+)
 1640-<1800 DIRM LB3 (OD 3+)
 1800-<1980 DI LB4 + R LB3Y + M LB3 (OD 4+)
 1980-2600 DI LB4 + R LB3Y + M LB3 (OD 5+)
 >2600-3500 DI LB4 + R LB3Y + M LB3 (OD 4+)
 >3500-<5400 DIRM LB2 (OD 2+)
 5400-15000 DI LB4 + R LB3Y + M LB4Y (OD 6+)
 LVU F CE



Manufactured by:
 LASERVISION USA, LP
 595 Phalen Boulevard,
 Saint Paul, MN 55130
 info@lasersafety.com | lasersafety.com
 P 800-393-5565

F42.P1D09.5000

1400-<1450 DIRM LB1 (OD 1+)
 1450-<1640 DIRM LB2 (OD 2+)
 1640-<1800 DIRM LB3 (OD 3+)
 1800-<1980 DI LB4 + R LB3Y + M LB3 (OD 4+)
 1980-2600 DI LB4 + R LB3Y + M LB3 (OD 5+)
 >2600-3500 DI LB4 + R LB3Y + M LB3 (OD 4+)
 >3500-<5400 DIRM LB2 (OD 2+)
 5400-15000 DI LB4 + R LB3Y + M LB4Y (OD 6+)
 LVU F CE



Manufactured by:
 LASERVISION USA, LP
 595 Phalen Boulevard,
 Saint Paul, MN 55130
 info@lasersafety.com | lasersafety.com
 P 800-393-5565

F22.P1D09.5000

1400-<1450 DIRM LB1 (OD 1+)
 1450-<1640 DIRM LB2 (OD 2+)
 1640-<1800 DIRM LB3 (OD 3+)
 1800-<1980 DI LB4 + R LB3Y + M LB3 (OD 4+)
 1980-2600 DI LB4 + R LB3Y + M LB3 (OD 5+)
 >2600-3500 DI LB4 + R LB3Y + M LB3 (OD 4+)
 >3500-<5400 DIRM LB2 (OD 2+)
 5400-15000 DI LB4 + R LB3Y + M LB4Y (OD 6+)
 LVU F CE



Manufactured by:
 LASERVISION USA, LP
 595 Phalen Boulevard,
 Saint Paul, MN 55130
 info@lasersafety.com | lasersafety.com
 P 800-393-5565

F47.P1D09.5000

1400-<1450 DIRM LB1 (OD 1+)
 1450-<1640 DIRM LB2 (OD 2+)
 1640-<1800 DIRM LB3 (OD 3+)
 1800-<1980 DI LB4 + R LB3Y + M LB3 (OD 4+)
 1980-2600 DI LB4 + R LB3Y + M LB3 (OD 5+)
 >2600-3500 DI LB4 + R LB3Y + M LB3 (OD 4+)
 >3500-<5400 DIRM LB2 (OD 2+)
 5400-15000 DI LB4 + R LB3Y + M LB4Y (OD 6+)
 LVU F CE



Manufactured by:
 LASERVISION USA, LP
 595 Phalen Boulevard,
 Saint Paul, MN 55130
 info@lasersafety.com | lasersafety.com
 P 800-393-5565